




the future is safer with altro

altro




Altro Stronghold™ 30 / K30

Safety flooring / Suelos de seguridad / Sicherheitsbodenbelag




Monsoon K30153
WR81 / A1M81 / LRV24




Dolphin K3010
WR86 / A1M86 / LRV21




Abyss K3001
WR100 / A1M100 / LRV7




Skyline K30332
WR52 / A1M52 / LRV24




Oyster K30215
WR20 / A1M20 / LRV36




Surf K30412
WR71 / A1M71 / LRV20

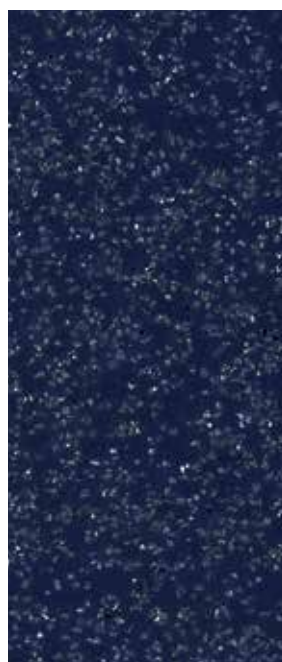


Lagoon K30910
WR39 / A1M34 / LRV7

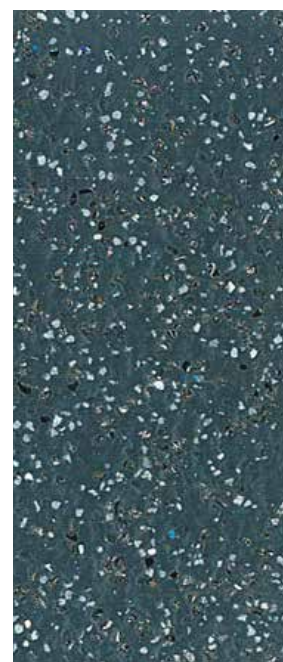


Midnight K30421
WR72 / A1M72 / LRV11




Maple K30522
WR24 / A1M27 / LRV31



Camel K3017
WR64 / A1M239 / LRV26



Russet K30262
WR41 / A1M41 / LRV14



Tundra K30500
WR153 / A1M239 / LRV17



Velvet K30365
WR256 / A1M148 / LRV8

Codes: WR = weld rod, A1M = mastic, LRV = light reflectance value

Códigos: WR = Cordon de soldadura, A1M = Mástique, LRV = Valor de reflectancia de la Luz

Abkürzungen: WR = Schweißschnüre, A1M = Altro mastic dichtmasse, LRV = Lichtreflexionswert



Altro Stronghold™ 30 / K30

Typical Applications:

Kitchens. Canteens. Food preparation and service areas. Areas where grease, oils or fats are present.

Zonas de instalación recomendadas:

Cocinas. Cafeterías. Zonas de preparación y servicio de alimentos. Zonas donde se trabaje con aceite o grasa

Typische Anwendungsbereiche:

Küchen. Kantinen. Lebensmittelzubereitung und Servicebereiche. Bereiche, in denen mit Schmiermitteln, Ölen oder Fetten gearbeitet wird.



Looks great with:

Resultados espectaculares con:

Harmoniert besonders in Kombination mit:

Altro Whiterock White™

Altro Whiterock Satins™

Altro Classic™ 25

Slip resistance / Resistencia al deslizamiento / Rutschfestigkeit

Tested with / Testado con / Getestet mit:

Water / Agua / Wasser

Greasy water / Agua con grasa / Öliges Wasser

Flour / Harina / Mehl

**Vegetable Oil / Aceite vegetal
Pflanzenöl**

Milk / Leche / Milch

**Plastic wrapping
Envoltorio de plástico
Plastikverpackung**

Technical information / Información técnica / Technische Informationen

Flooring type Tipo de pavimento Belagsart	Slip resistance Resistencia al deslizamiento Rutschsicherheit	Thickness Espesor total Gesamtdicke	Weight Peso Flächengewicht	Roll dimensions Dimensiones del rollo Rollenabmessungen	Fire performance Reacción al fuego Brandverhalten
EN 13845 EN 13553	TRRL / CTE EN 13845 EN 13893 DIN 51130	EN 428	EN 430	EN 426	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2
Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag	≥ 55 Class 3 / Clase 3 / Klasse 3 (CTE) ESf DS R12	3 mm	3.9 kg/m ²	2 m x 15 m = 30 m ²	Bfl s1 ≥8kw/m ² pass, conforme, bestanden
<p> For further technical information please visit www.altro.com / www.asf.com.au Si desea obtener más información técnica, visite www.altroscandess.com Weitere technische Informationen finden Sie auf unserer website www.altro.de</p>					

Sustainability / Sostenibilidad / Nachhaltigkeit

Altro are the first safety flooring manufacturer to recycle traditional safety flooring in-house



A+ BRE generic green guide rating for safety flooring, full details available at www.thegreenguide.org.uk



+44 (0) 1462 707 700

+34 91 549 52 30

+61 3 9764 5666

www.altro.com

www.altroscandess.com

www.asf.com.au

enquiries@altro.com

suelos@altroscandess.com

info@asf.com.au



CE

EN14041
0120
GB06/72664

Manufactured by:
Altro Ltd, Works Road
Letchworth Garden City
SG6 1NW, United Kingdom

EN13845

Installation and Maintenance

All Installations in accordance with Altro safety flooring instructions and local codes of practice. Please refer to Altro cleaning card for maintenance advice. Failure to install and maintain Altro flooring in accordance with installation instructions can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover.

Traffic stain can be caused by oil residue, certain cleaning agents, asphalt and anti-oxidants in some types of rubber.

Caution

ketone / aromatic solvents. Please contact Altro for further technical advice regarding staining and chemical resistance. Certain chemicals may cause staining of vinyl.

Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.

Light Reflectance Values measured in accordance with BS8493:2008. Exact material match with samples cannot be guaranteed. No podemos garantizar que el material del suelo de seguridad coincida exactamente con el de las muestras. Eine exakte Übereinstimmung des materials mit mustern kann nicht garantiert werden. All information is correct at the time of print and is subject to change without prior notice.